
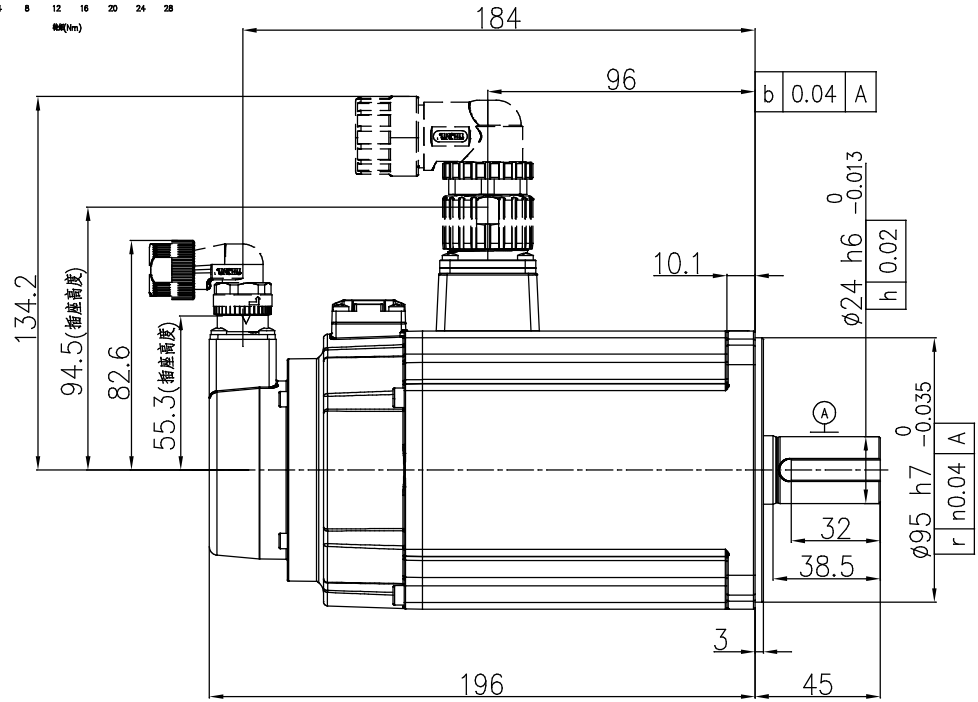
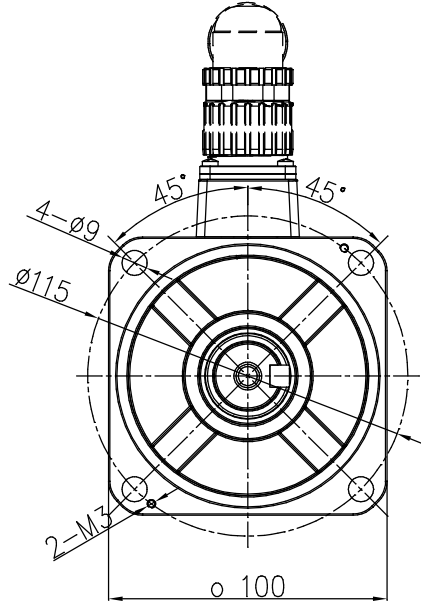
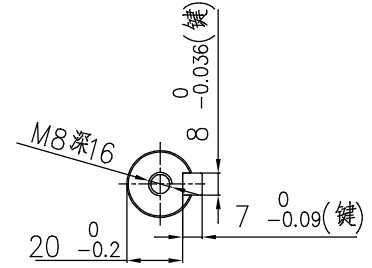



1		2	3	4	5	6	7	8	
A	电机规格								
	额定功率(W)	2000							型号 P3S-L20B210ET
	额定电压(V)	380							料号 10710010A00066
	额定转矩(Nm)	6.37							
B	最大转矩(Nm)	19.1							
	额定电流(Arms)	7.05							
	最大电流(Arms)	19.78							
	额定转速(rpm)	3000							
C	最大转速(rpm)	5000							
	频率(Hz)	250							
	转动惯量($\times 10^{-4} \text{kg.m}^2$)	4.4							
	线电阻(Ω)	0.720 $\pm$ 5%							
D	线电感(mH)	8.645 $\pm$ 20%							
	LQ	4.745 $\pm$ 20%							
	LD	3.9 $\pm$ 20%							
	线反电势(V/1000rpm)	63.36 $\pm$ 8%							
E	转矩常数(Nm/Arms)	0.904							
	电气时间常数(ms)	12.007							
	极对数	5							
	绝缘等级	Ins F							
F	防护等级	IP 67							
	重量(kg)	6.1							
	单体包装重量(kg)	6.9							
	集合包装数量(Pcs)	N/A							
G	集合包装重量(kg)	N/A							
	制动器(保持型)								
	制动器额定电压(V)	DC24							
	制动器保持扭矩(Nm)	8							
H	制动器额定功率(W)	17.6							
	制动器额定电阻(Ω)	32.7 $\pm$ 7%							
	编码器规格								
	类型	光编							
I	单圈分辨率	23bit							
	多圈计数容量	16bit							
	动力连接器定义		信号连接器定义						
	底图总号								
J	签字								
	日期								
1		2	3	4	5	6	7	8	



阶段标记		重量	比例	材质
A				名称 高创旋转伺服电机
第一角法				料号
共 1 张 第 1 张		版本	A0	规格